



# Glyph

Sconces



50 Greene St  
New York NY 10013  
T +1 212 388 1621  
[sales@rbw.com](mailto:sales@rbw.com)

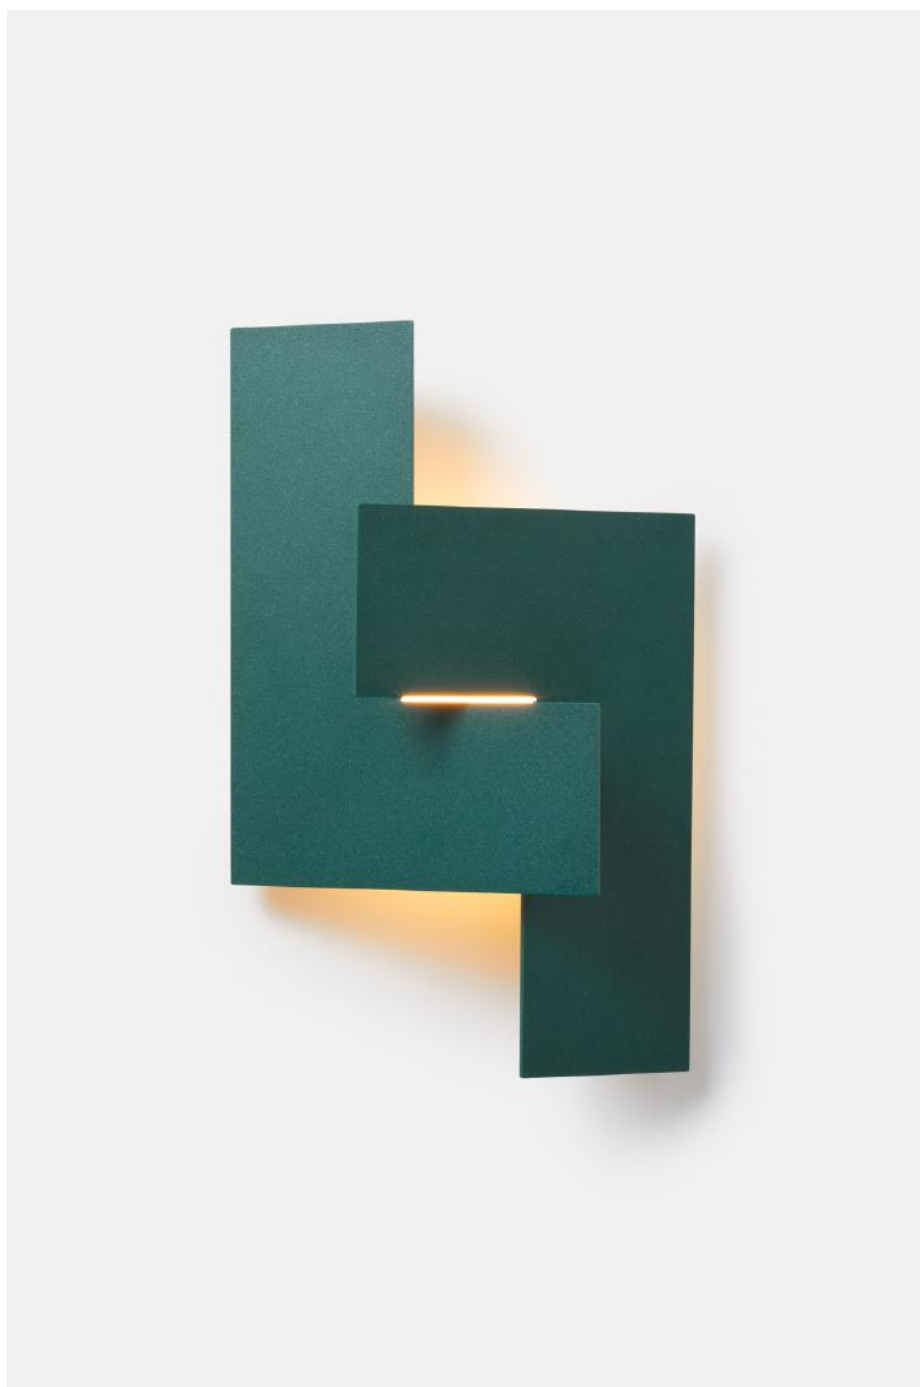

For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit [rbw.com](http://rbw.com)

**DESCRIPTION**

Designed in collaboration with the acclaimed Yabu Pushelberg studio, our newest Glyph sconce embraces the gestural simplicity of glyphs—symbols that compact meaning into a minimal graphic form. The collaborative design comprises two vertical panels joined at 90 degrees that form two halves of a whole—an intersection of contrasting colors and textures, as well as distinct shadows that complement a soft diffusion of light.

**MATERIALS**

Aluminum sheet, plastic diffuser, metallic powder coat aluminum base.

**PERFORMANCE**

186.7 lm

Power Consumption 7W

Luminaire Watts 7W

26.1 lm

90 CRI

Above stats are measured on Glyph sconce in Natural finish with DC power input

For other variations please see photometry download below

**LED LIFESPAN**

50k hours

**PATENT FILE NUMBER**

Patent Pending

**CERTIFICATION**

ADA Compliant

UL Listed

Suitable for Damp Locations

IP65

**NOTE ON IMAGERY**

All product photos are made using the correlated color temperature (CCT) of 2700k. The actual color temperature experienced within your environment may vary based on other light sources and materials present.

## YOUR PRODUCT CODE

GY-PC28-27-10\_TRIAC\_120V-IP65

## Specification Logic

## BACKPLATE FINISH

Glimmer	PC32
Luster	PC93
Natural	PC92
Emerald	PC28
Custom Powder Coat	PCXX

## CCT

2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35



## DIMMING / CONTROL / INPUT

0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	0.1 10V UNV
1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	1 10V UNV
1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External)	1_TRIAC_120V
10% Dimming, TRIAC / Forward Phase Control, 120V Input	10 TRIAC 120V
Low Voltage (Driver required, driver not included)	LV

## IP RATING

IP 65	IP65
-------	------

Drawings

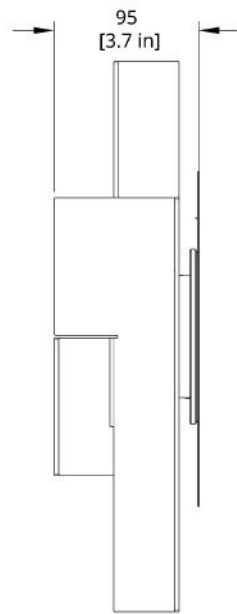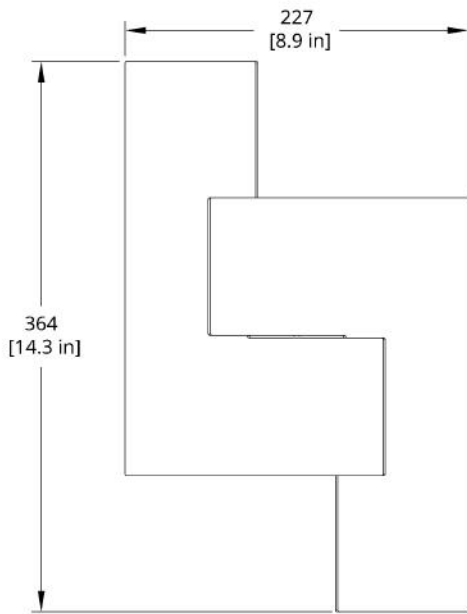

GY Glyph Sconce